


for tilt and turn opening of PVC windows

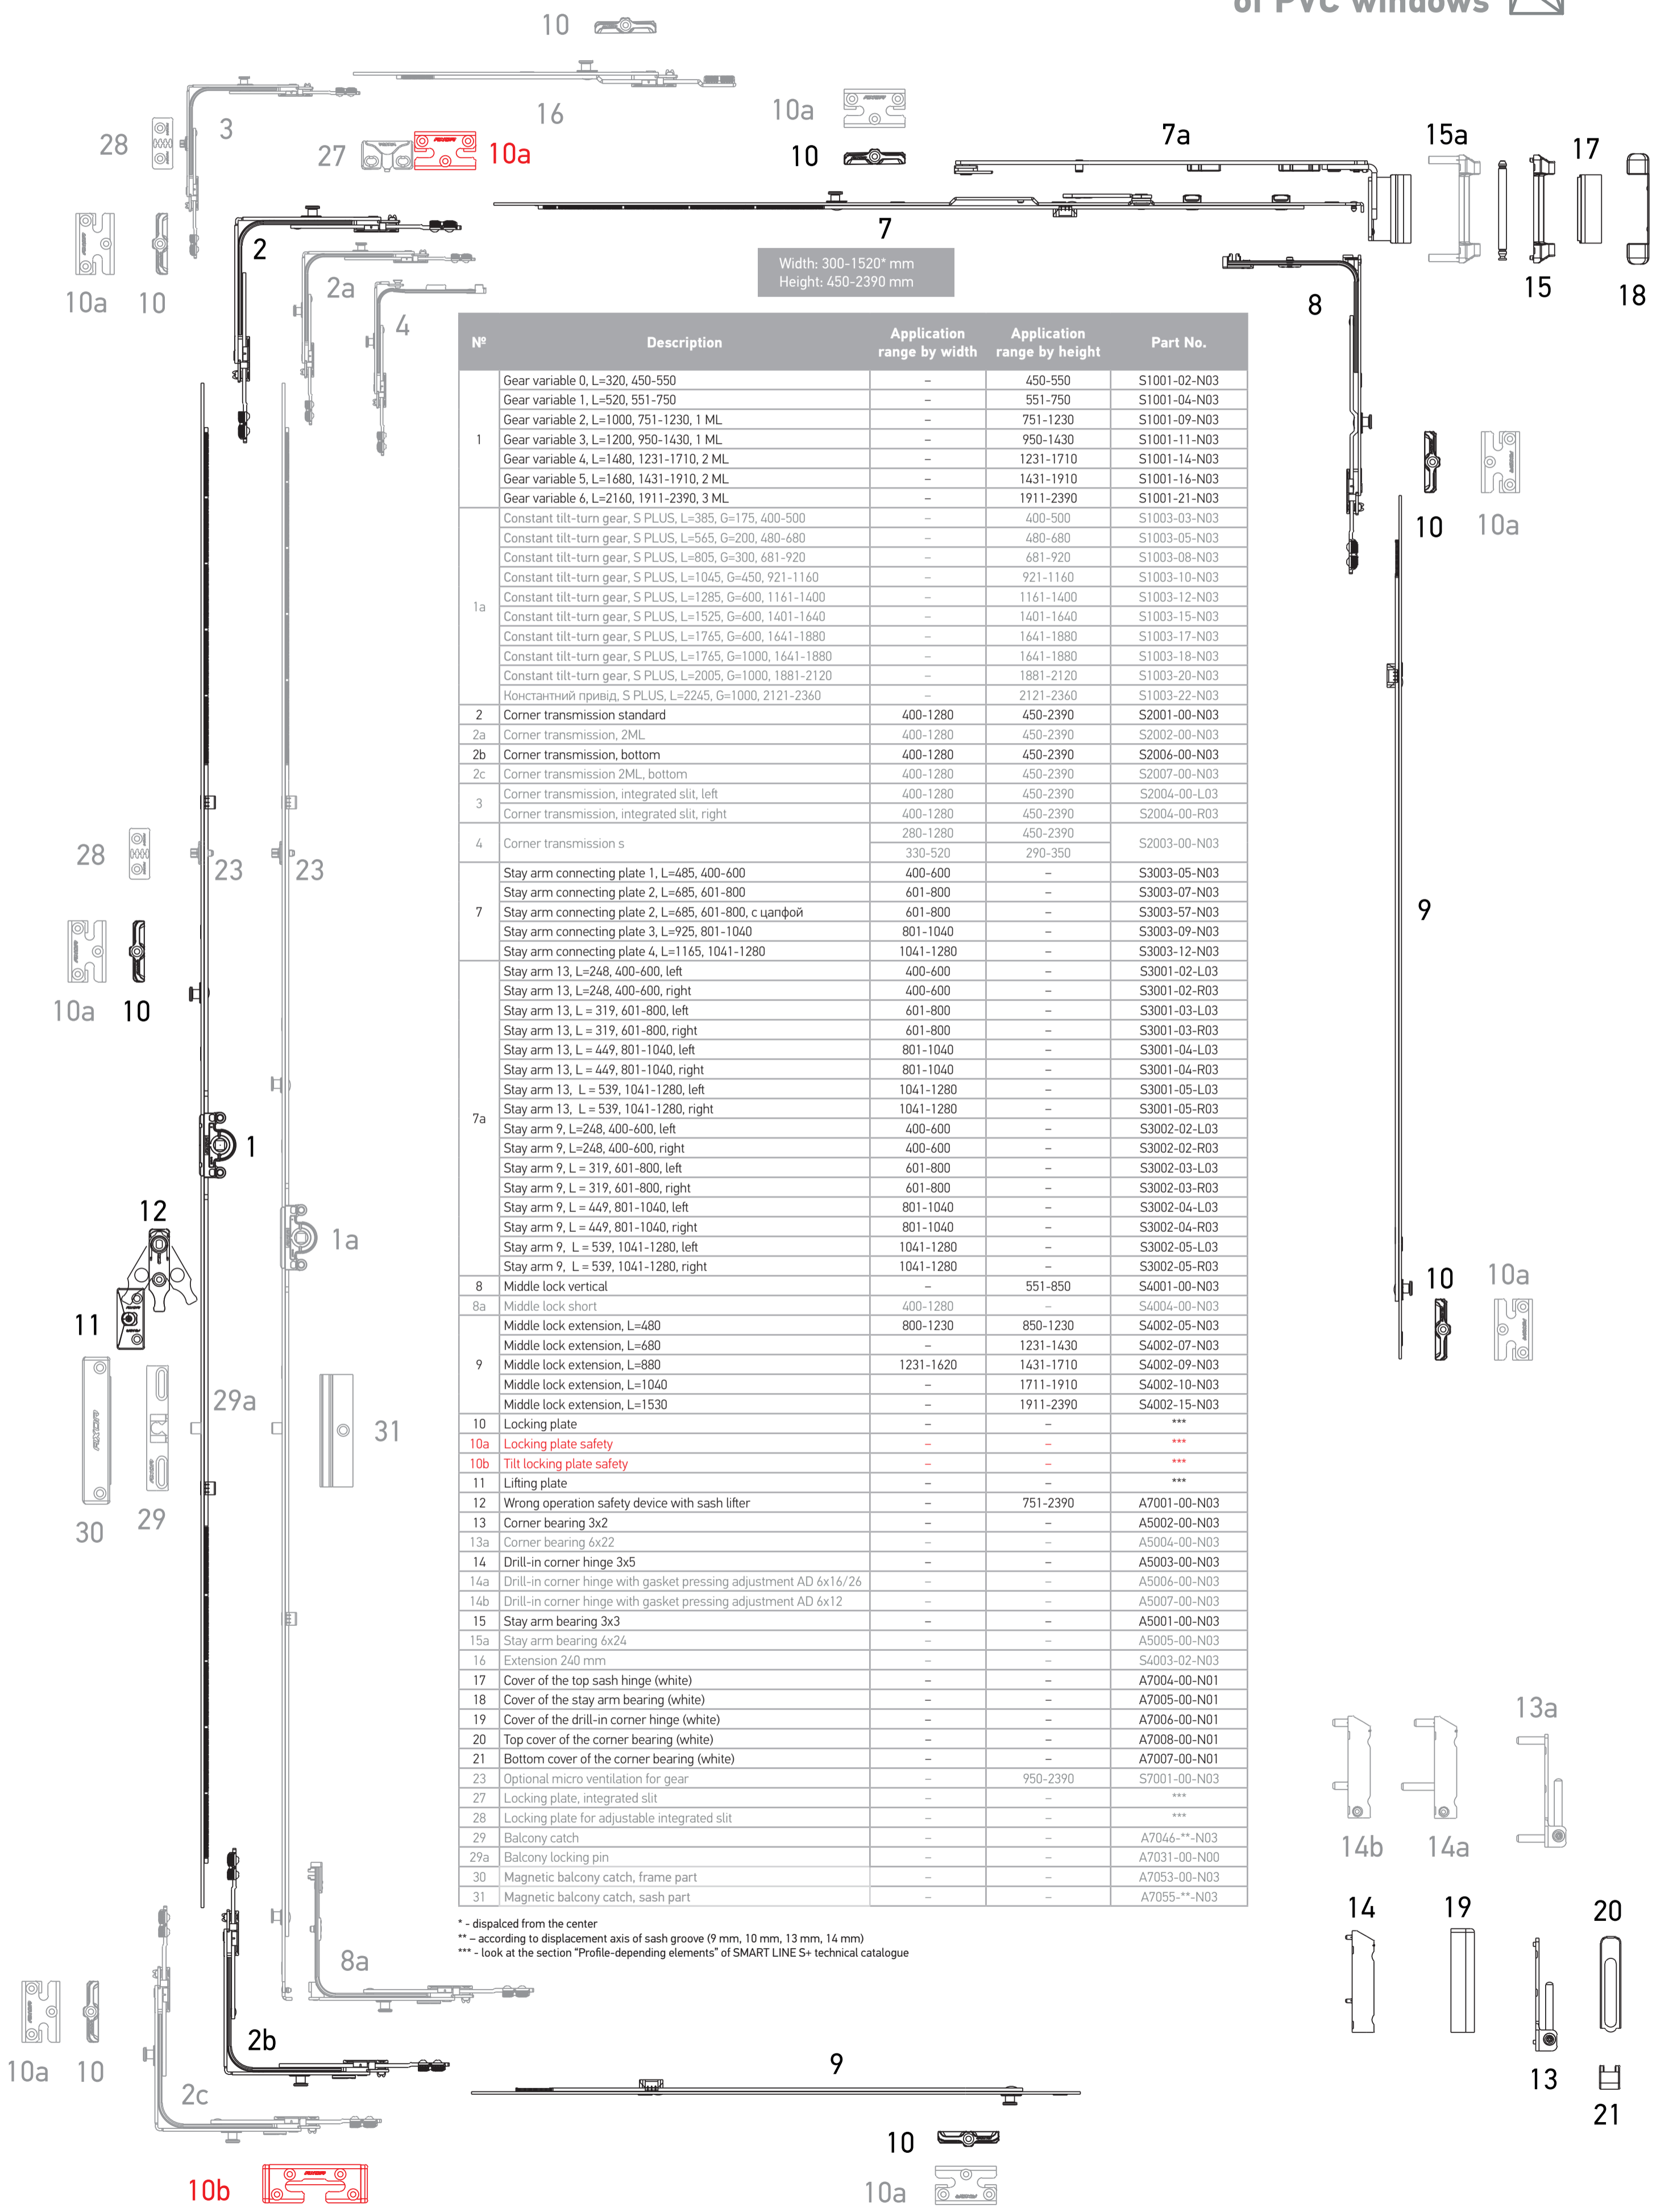

Width: 300-1520* mm
Height: 450-2390 mm

Nº	Description	Application range by width	Application range by height	Part No.
1	Gear variable 0, L=320, 450-550	-	450-550	S1001-02-N03
	Gear variable 1, L=520, 551-750	-	551-750	S1001-04-N03
	Gear variable 2, L=1000, 751-1230, 1 ML	-	751-1230	S1001-09-N03
	Gear variable 3, L=1200, 950-1430, 1 ML	-	950-1430	S1001-11-N03
	Gear variable 4, L=1480, 1231-1710, 2 ML	-	1231-1710	S1001-14-N03
	Gear variable 5, L=1680, 1431-1910, 2 ML	-	1431-1910	S1001-16-N03
1a	Gear variable 6, L=2160, 1911-2390, 3 ML	-	1911-2390	S1001-21-N03
	Constant tilt-turn gear, S PLUS, L=385, G=175, 400-500	-	400-500	S1003-03-N03
	Constant tilt-turn gear, S PLUS, L=565, G=200, 480-680	-	480-680	S1003-05-N03
	Constant tilt-turn gear, S PLUS, L=805, G=300, 681-920	-	681-920	S1003-08-N03
	Constant tilt-turn gear, S PLUS, L=1045, G=450, 921-1160	-	921-1160	S1003-10-N03
	Constant tilt-turn gear, S PLUS, L=1285, G=600, 1161-1400	-	1161-1400	S1003-12-N03
	Constant tilt-turn gear, S PLUS, L=1525, G=600, 1401-1640	-	1401-1640	S1003-15-N03
	Constant tilt-turn gear, S PLUS, L=1765, G=600, 1641-1880	-	1641-1880	S1003-17-N03
	Constant tilt-turn gear, S PLUS, L=1765, G=1000, 1641-1880	-	1641-1880	S1003-18-N03
	Constant tilt-turn gear, S PLUS, L=2005, G=1000, 1881-2120	-	1881-2120	S1003-20-N03
2	Corner transmission standard	400-1280	450-2390	S2001-00-N03
	Corner transmission, 2ML	400-1280	450-2390	S2002-00-N03
2a	Corner transmission, 2ML	400-1280	450-2390	S2002-00-N03
2b	Corner transmission, bottom	400-1280	450-2390	S2006-00-N03
2c	Corner transmission 2ML, bottom	400-1280	450-2390	S2007-00-N03
3	Corner transmission, integrated slit, left	400-1280	450-2390	S2004-00-L03
	Corner transmission, integrated slit, right	400-1280	450-2390	S2004-00-R03
4	Corner transmission s	280-1280	450-2390	S2003-00-N03
		330-520	290-350	
7	Stay arm connecting plate 1, L=485, 400-600	400-600	-	S3003-05-N03
	Stay arm connecting plate 2, L=685, 601-800	601-800	-	S3003-07-N03
	Stay arm connecting plate 2, L=685, 601-800, с цапфой	601-800	-	S3003-57-N03
	Stay arm connecting plate 3, L=925, 801-1040	801-1040	-	S3003-09-N03
7a	Stay arm connecting plate 4, L=1165, 1041-1280	1041-1280	-	S3003-12-N03
	Stay arm 13, L=248, 400-600, left	400-600	-	S3001-02-L03
	Stay arm 13, L=248, 400-600, right	400-600	-	S3001-02-R03
	Stay arm 13, L=319, 601-800, left	601-800	-	S3001-03-L03
	Stay arm 13, L=319, 601-800, right	601-800	-	S3001-03-R03
	Stay arm 13, L=449, 801-1040, left	801-1040	-	S3001-04-L03
	Stay arm 13, L=449, 801-1040, right	801-1040	-	S3001-04-R03
	Stay arm 13, L=539, 1041-1280, left	1041-1280	-	S3001-05-L03
	Stay arm 13, L=539, 1041-1280, right	1041-1280	-	S3001-05-R03
	Stay arm 9, L=248, 400-600, left	400-600	-	S3002-02-L03
	Stay arm 9, L=248, 400-600, right	400-600	-	S3002-02-R03
	Stay arm 9, L=319, 601-800, left	601-800	-	S3002-03-L03
	Stay arm 9, L=319, 601-800, right	601-800	-	S3002-03-R03
	Stay arm 9, L=449, 801-1040, left	801-1040	-	S3002-04-L03
Stay arm 9, L=449, 801-1040, right	801-1040	-	S3002-04-R03	
8	Stay arm 9, L=539, 1041-1280, left	1041-1280	-	S3002-05-L03
	Stay arm 9, L=539, 1041-1280, right	1041-1280	-	S3002-05-R03
	Middle lock vertical	-	551-850	S4001-00-N03
	Middle lock short	400-1280	-	S4004-00-N03
	Middle lock extension, L=480	800-1230	850-1230	S4002-05-N03
	Middle lock extension, L=680	-	1231-1430	S4002-07-N03
9	Middle lock extension, L=880	1231-1620	1431-1710	S4002-09-N03
	Middle lock extension, L=1040	-	1711-1910	S4002-10-N03
	Middle lock extension, L=1530	-	1911-2390	S4002-15-N03
	Locking plate	-	-	***
10a	Locking plate safety	-	-	***
10b	Tilt locking plate safety	-	-	***
11	Lifting plate	-	-	***
12	Wrong operation safety device with sash lifter	-	751-2390	A7001-00-N03
13	Corner bearing 3x2	-	-	A5002-00-N03
13a	Corner bearing 6x22	-	-	A5004-00-N03
14	Drill-in corner hinge 3x5	-	-	A5003-00-N03
14a	Drill-in corner hinge with gasket pressing adjustment AD 6x16/26	-	-	A5006-00-N03
14b	Drill-in corner hinge with gasket pressing adjustment AD 6x12	-	-	A5007-00-N03
15	Stay arm bearing 3x3	-	-	A5001-00-N03
15a	Stay arm bearing 6x24	-	-	A5005-00-N03
16	Extension 240 mm	-	-	S4003-02-N03
17	Cover of the top sash hinge (white)	-	-	A7004-00-N01
18	Cover of the stay arm bearing (white)	-	-	A7005-00-N01
19	Cover of the drill-in corner hinge (white)	-	-	A7006-00-N01
20	Top cover of the corner bearing (white)	-	-	A7008-00-N01
21	Bottom cover of the corner bearing (white)	-	-	A7007-00-N01
23	Optional micro ventilation for gear	-	950-2390	S7001-00-N03
27	Locking plate, integrated slit	-	-	***
28	Locking plate for adjustable integrated slit	-	-	***
29	Balcony catch	-	-	A7046-**-N03
29a	Balcony locking pin	-	-	A7031-00-N00
30	Magnetic balcony catch, frame part	-	-	A7053-00-N03
31	Magnetic balcony catch, sash part	-	-	A7055-**-N03

* - displaced from the center
** - according to displacement axis of sash groove (9 mm, 10 mm, 13 mm, 14 mm)
*** - look at the section "Profile-dependent elements" of SMART LINE S+ technical catalogue